



creativity
quality
integrity

TIOTECH

foam Bladder Tank Specialist

a local company with germany's quality



TENTANG KAMI



CV. TIO TECHNOLOGY Adalah perusahaan pmdn yang berdiri pada tahun 2010 yang berbekal pengalaman dan pendidikan dan merupakan salah satu group perusahaan besar di Jakarta yang bekerja sama dengan perusahaan luar dan dalam negeri yang bergerak di dalam "Engineering dan Trading" dalam segala bidang guna untuk memenuhi kebutuhan konsumen pedesaan hingga perkotaan dan masyarakat luas pada umumnya.

VISI & MISI

Adalah perusahaan pmdn yang berdiri pada tahun 2010 yang berbekal pengalaman dan pendidikan dan merupakan salah satu group perusahaan besar di Jakarta yang bekerja sama dengan perusahaan luar dan dalam negeri yang bergerak di dalam "Engineering dan Trading" dalam segala bidang guna untuk memenuhi kebutuhan konsumen pedesaan hingga perkotaan dan masyarakat luas pada umumnya. Berusaha semaksimal mungkin untuk meratakan informasi kemajuan dan perkembangan teknologi dan pembangunan kepada masyarakat, untuk memenuhi dan melayani kebutuhan konsumen dengan meningkatkan mutu dari masa ke masa berkesinambungan untuk meningkatkan taraf hidup lapisan masyarakat.

INDEX

TENTANG KAMI	1
INDEX	2
RELIABILITY DAN SAFETY	3
OUR COMPANY OPERATES IN	4
OUR CERTIFICATES	5
OUR PRODUCT	6
CRUDE OIL STORAGE TANK INSTRUMENT	6
FIRE FIGHTING EQUIPMENT	9
INDUSTRIES UTILITY	12
PRESSURE TANK	18
PUMP	21
WASTE WATER TREATMENT EQUIPMENT	24
OUR CUSTOMER	28

RELIABILITY DAN SAFETY

jaminan reliability dan safety kepada customer CV. TIO TECHNOLOGY melengkapi dokumen-dokumen pendukung antara lain sebagai berikut:

- **Akte Pendirian Perusahaan Pengesahan Pengadilan Negeri: No. 12/AHU-00152.02.02.TAHUN 2022**
- **Surat Keterangan Domisili Usaha: No. 503/27-Bblk**
- **Nomor Pokok Wajib Pajak: 12.849.973.8-404.000**
- **Surat Pengukuhan Pengusaha Kena Pajak: No. S-199/PKP/KPP .331003/ 2024**
- **Nomor Induk Berusaha (NIB): 0703240015526**
- **Bank Mandiri Kantor Cabang Pembantu Soleh Iskandar Bogor" dengan nomor rekening: 133-00-2827376-1**



OUR COMPANY OPERATES IN


CONSTRUCTION



MANUFACTURING



CHEMICAL



OFFSHORE



OIL & GAS

OUR CERTIFICATES



CERTIFICATE

Quality Management System of
CV. TIO TECHNOLOGY
4W Office, Jl. Ring Road Bubulak No. A-4 RT. 001 RW. 001, Kel. Bubulak, Kec. Bogor Barat,
Kota Bogor, Prov. Jawa Barat Kode Pos 16115

has been assessed and certified as meeting the requirements of
ISO 9001:2015
For the following activities

Provision of Wholesale of Office Machinery and Processing Industry, Equipment and Supplies

Further clarifications regarding the scope of this certificate and the applicability of
ISO 9001:2015 requirements may be obtained by consulting the organization

EA Code
Certification Number
Issue Date Certificate
Certification valid until
Planning to be 1 surveillance
Planning to be 2 surveillance
Planning Recertification

: 29
: CROMS-1179-321179
: October, 07 2024
: October, 07 2027
: October, 07 2025
: October, 07 2026
: October, 07 2027

Authorised by

PT. SOA Sertifikasi Indonesia
Jl. Penyelesaian Tomang IV Blok 51 No. 32D, Meruya Utara, Kembangan, Jakarta
Barat 11620, Indonesia
t +62 21 22542483 www.ss-indonesia.id

To verify the validity of this certificate please visit : www.ss-indonesia.id
This is to certify that the management systems of this company has been found to
confirm above

SOA SERTIFIKASI INDONESIA
 International
Organization for
Standardization



CERTIFICATE

Occupational Health and Safety Management System of
CV. TIO TECHNOLOGY
4W Office, Jl. Ring Road Bubulak No. A-4 RT. 001 RW. 001, Kel. Bubulak, Kec. Bogor Barat,
Kota Bogor, Prov. Jawa Barat Kode Pos 16115

has been assessed and certified as meeting the requirements of
ISO 45001:2018
For the following activities

Provision of Wholesale of Office Machinery and Processing Industry, Equipment and Supplies

Further clarifications regarding the scope of this certificate and the applicability of
ISO 45001:2018 requirements may be obtained by consulting the organization

EA Code
Certification Number
Issue Date Certificate
Certification valid until
Planning to be 1 surveillance
Planning to be 2 surveillance
Planning Recertification

: 29
: CROHA-1179-321179
: October, 07 2024
: October, 07 2027
: October, 07 2025
: October, 07 2026
: October, 07 2027

Authorised by

PT. SOA Sertifikasi Indonesia
Jl. Penyelesaian Tomang IV Blok 51 No. 32D, Meruya Utara, Kembangan, Jakarta
Barat 11620, Indonesia
t +62 21 22542483 www.ss-indonesia.id

To verify the validity of this certificate please visit : www.ss-indonesia.id
This is to certify that the management systems of this company has been found to
confirm above

SOA SERTIFIKASI INDONESIA
 International
Organization for
Standardization



CERTIFICATE

Environmental Management System of
CV. TIO TECHNOLOGY
4W Office, Jl. Ring Road Bubulak No. A-4 RT. 001 RW. 001, Kel. Bubulak, Kec. Bogor Barat,
Kota Bogor, Prov. Jawa Barat Kode Pos 16115

has been assessed and certified as meeting the requirements of
ISO 14001:2015
For the following activities

Provision of Wholesale of Office Machinery and Processing Industry, Equipment and Supplies

Further clarifications regarding the scope of this certificate and the applicability of
ISO 14001:2015 requirements may be obtained by consulting the organization

EA Code
Certification Number
Issue Date Certificate
Certification valid until
Planning to be 1 surveillance
Planning to be 2 surveillance
Planning Recertification

: 29
: CREMS-1179-321179
: October, 07 2024
: October, 07 2027
: October, 07 2025
: October, 07 2026
: October, 07 2027

Authorised by

PT. SOA Sertifikasi Indonesia
Jl. Penyelesaian Tomang IV Blok 51 No. 32D, Meruya Utara, Kembangan, Jakarta
Barat 11620, Indonesia
t +62 21 22542483 www.ss-indonesia.id

To verify the validity of this certificate please visit : www.ss-indonesia.id
This is to certify that the management systems of this company has been found to
confirm above

SOA SERTIFIKASI INDONESIA
 International
Organization for
Standardization

OUR PRODUCT



CRUDE OIL STORAGE TANK INSTRUMENT

CRUDE OIL STORAGE TANK INSTRUMENT

BREATHER VALVE

The Pressure & Vacuum Relief Valve is a device which prevents evaporation losses while protecting the tank from possible damaging effects of over pressure over vacuum.

Pressure Relief - (Out Breathing) When the vapor space pressure within a storage tank exceeds the Set point the pressure relief vent open to release vapor from the tank until the pressure is reduced below the set point.

Vacuum Relief - (In Breathing) When a vacuum is created within a storage tank and exceeds the set vacuum point the vacuum vent opens to admit atmospheric air in to the storage tank until a vacuum is reduced to set point.



PRECON

TOPSAFE

TKT TANKTECH


SHAND&JURS

FLAME ARRESSTER

Deflagration type In Line Bi Directional Precon In Line Deflagration Flame Arresters are designed to be installed in a pipeline very close to the potential source of ignition and thus prevent any flame or explosion proceeding further. such an explosion would be a confined deflagration.

Such an explosion would be a confined deflagration. The pipeline between the flame arrester and the source of ignition should be straight, smooth, unobstructed and without any bends, junctions or changes in section.

These products are essential safety equipment for the protection of plant and personnel from the risk of fire and explosion.

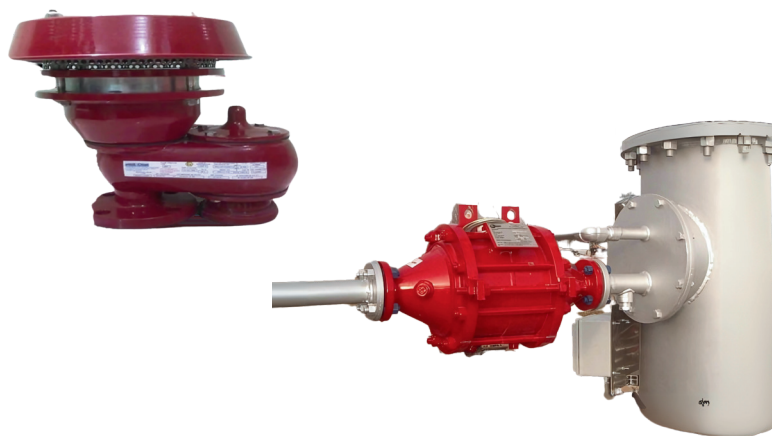

PRECON

TOPSAFE

TKT TANKTECH

SHAND&JURS


GAGUE HATCH

Detail Precon Gauge Hatch Oil Gauge

Gauge hatch is designed to provide easy access to storage tanks for gauging product level or temperature or product sampling. This gauge provide for emergency venting up to 1 Oz/ Square Inch. All size are drilled to match ANSI 150 LB FF Flanges.

Size Available: 4", 6", 8", 10"

Precon AML Pertamina Ex. India

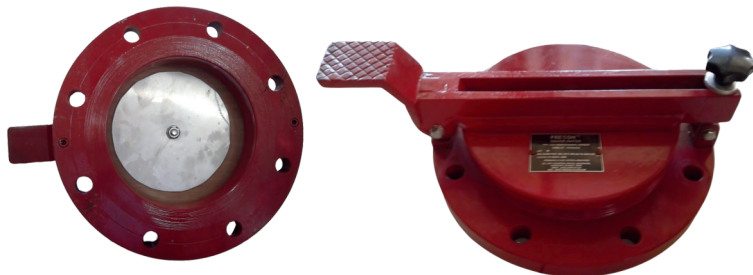

PRECON

TOPSAFE


TKT TANKTECH

SHAND&JURS

CRUDE OIL STORAGE TANK INSTRUMENT

LIQUID LEVEL INDICATOR

The Shand & Jurs Model 92302 Liquid Level Indicator is a reliable and affordable float actuated level gauging system. It is designed to provide reliable and virtually trouble-free service for installation not requiring accuracies better than ± 1 inch.

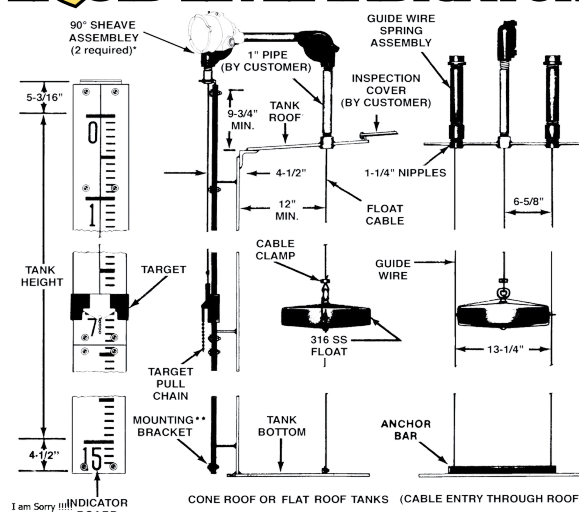

SHAND & JURs

SHUTDOWN VALVE

The Bettis CBB-Series scotch yoke pneumatic actuator combines the strengths of the G-Series actuator and is compact, lightweight, efficient and very cost-effective.



EMERSON FISHER


SLOT DIPPING

The Slot Dipping Device


has been designed to provide a convenient and safe means of manually measuring the levels and taking samples of petroleum, petrochemical, chemical and other volatile or hazardous liquids in bulk storage tanks. In pressure of up to 1020 mm Wc.

It is available from 3" (80 mm) to 12" (300 mm) size and is mounted on the roofs of tanks and can be used in place of conventional gauge hatches with the following advantages:

- Negligible loss of vapor
- Operators not exposed to hazardous vapors
- No product spillage due to wiping of the tape

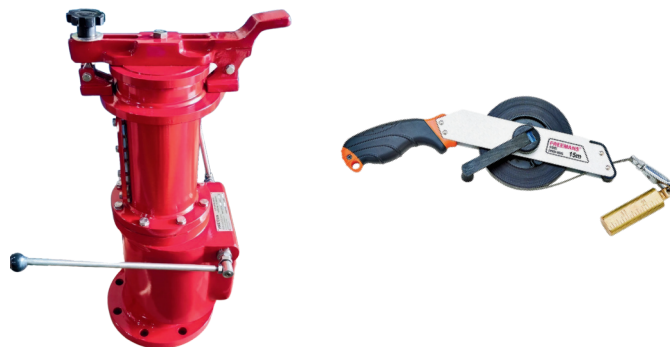

PRECON TOPSAFE TKT TANKTECH

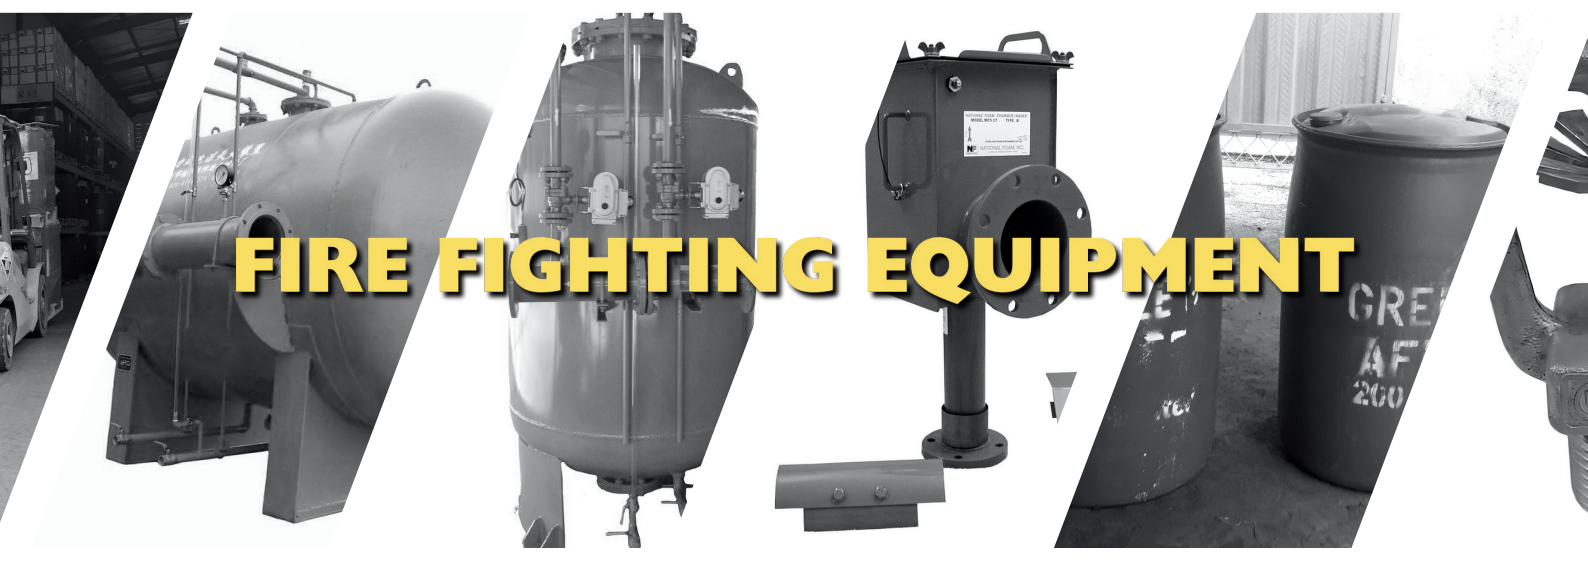

FIRE FIGHTING EQUIPMENT

FIRE FIGHTING EQUIPMENT

AFFF FOAM

FIRE FIGHTING FOAMS

ECOSOLVC6 AFFF, a non-toxic, environment friendly, biodegradable clear liquid with no stratification or turbidity, is a fluoro-chemical foam concentrate, commonly known as AQUEOUS FILM FORMING FOAM concentrate (AFFF), which represents a major advancement in foam technology.

FOAMER Brand AFFF available in the following variants:

- FOAMER BRAND ECOSOLVCS AFFF 1%
- FOAMER BRAND ECOSOLVC6 AFFF 3%
- FOAMER BRAND ECOSOLVC6 AFFF 6%



ECOSOLVES AR-AFFF Concentrate is formulated from special fluoro chemical and hydrocarbons surfactant, high molecular weight polymers, and solvents. When applied over polar solvents it forms a polymeric membrane to help prevent the release of the fuel vapor. Due to high drainage time, it has a better cooling effect.

FOAMER Brand AR AFFF available in the following variants:


- FOAMER BRAND ECOSOLVC6 AR AFFF 1/3
- FOAMER BRAND ECOSOLVC6 AR AFFF 3/3
- FOAMER BRAND ECOSOLVCS AR AFFF 3/6



AIR FOAM CHAMBER

FOAM CHAMBER

- Inlet Size: 50,65,80,100NB & 150NB
- Working Pressure: - 2.8 To 7.0 kg/cm²(40PSI to 100PSI)
- Material of Construction:- Carbon Steel or Stainless steel
- Flange Connection: - ANSI B16.5 Class 150#, RF
- Vapor Seal Rupture Pressure: - 0.7 To 1.75 Kg/Cm²(10 PSI to 25 PSI)
- Maximum Permissible Back Pressure On Vapor Seal: - 0.07 Kg/Cm² (1.0 PSI)
- Flow Range: 84 to 3175LPM
- Foam Concentrate: - AFFF-3% & AR-AFFF-3X3%
- Deflector: - Solid or Split Deflector
- Finish: - Red RAL 3001

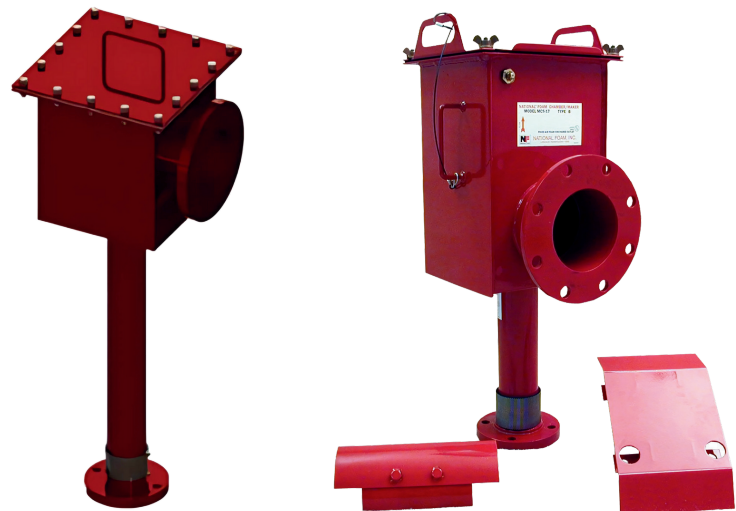

FIRE FIGHTING EQUIPMENT

FOAM BLADDER TANK

Our make The Bladder Tank is an integral component of the bladder tank proportioning system, which requires no external power other than an adequate water supply. A bladder tank, with an appropriate proportioner(s), injects foam concentrate into the water supply of a fire protection system and automatically proportions over a wide range of flows and pressures.



FOAM MAKER

- Inlet Size: 50NB & 65NB
- Working Pressure: - 2.8 To 7.0 kg/cm²(40PSI to100PSI)
- Material of Construction:- Carbon Steel or Stainless steel
- Flange Connection: - ANSI B16.5 Class 150#, RF
- Foam Concentrate: - AFFF-3% & AR-AFFF-3X3%
- Flow Range: - 84 to 555LPM
- Finish: - Red RAL 3001



NOZZLE SPRINKLER

Medium Velocity Spray Nozzles (UL Listed)

ITEM CODE: NFF-WSN-MVSN

Description :

- Directional Spray Nozzle with cone shaped spray pattern.
- Spray Nozzles are designed to produce extremely uniform coverage.
- Suitable for a minimum working pressure of 7 PSI (0.5 Bar) and maximum working pressure of 175 PSI (12 Bar).
- Wide Range of K-Factor and Spray Angle are available.
- Available in SS316 construction.






INDUSTRIES UTILITY


CHECK VALVE

The check valve is a valve that constantly maintains fluid flow in a constant direction and prevents reverse flow. The disc is pushed open by the fluid pressure, but when it flows backward, the disc is brought into close contact with the seat of the body by the back pressure to prevent backflow. There are three typical types of check valves (swing check valve, lift check valve, and wafer check valve).

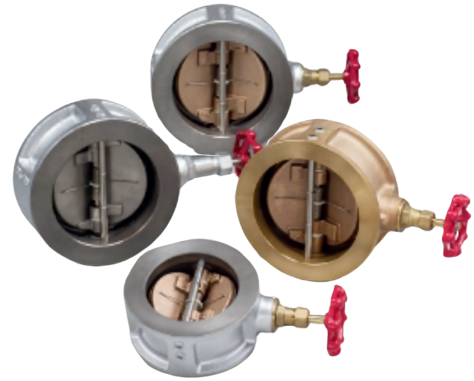

DIFFERENTIAL PRESSURE TRANSMITTER

Smart pressure transmitter which detects process anomalies like plugged impulse lines.

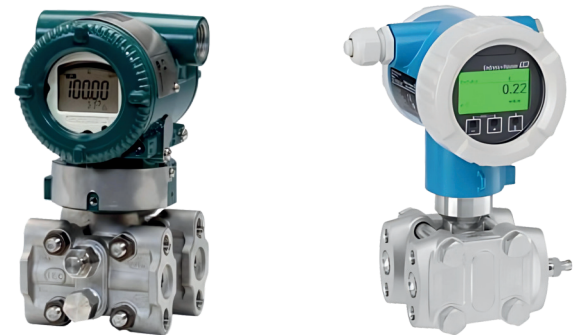

Endress+Hauser YOKOGAWA

FITTINGS

We provide wide range of products, instrumentation fittings cover twin ferrule tube fittings, pipe fittings, weld fittings, O-ring face seal fittings, vent protectors, dielectric fittings, fusible fittings, flange, etc.



FLEXIBLE HOSE

Prevention for damage of pipe and equipment by ground sinking, earthquake, etc. Making pipe alignment. Connection with machine and pipe.



TOZEN

FLEXIBLE RUBBER JOINT

APPLICATIONS


- This product is mainly applicable for piping systems in commercial and industrial buildings and plants.
- Applicable fluids are exclusively water including cold water, warm water, cooled water, sea water, etc.
- This product can not be used for drinking water, pool water, oil, or boiled water.



TOZEN

KLINGERSIL GASKET PLATE

Sealing plate Klingsil C-4400 fibre seal 350 x 250 mm

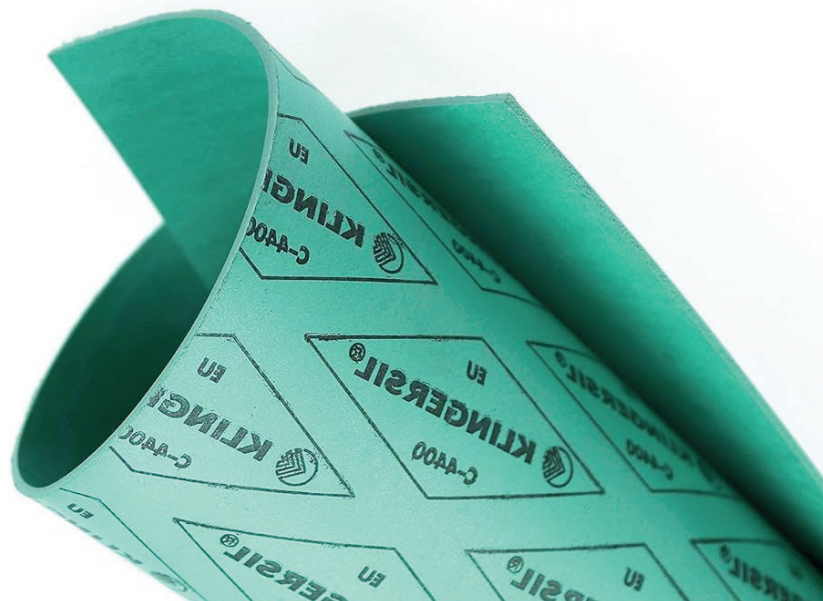

LEVEL GAUGE

The Magnicator Indicator is connected to a process vessel. The chamber, or "column", contains a sealed float with a permanent magnet assembly which rises and falls as the liquid level changes in the process vessel.

The permanent magnet assembly in the float is magnetically coupled to an indicator, which is mounted externally to the gage column but completely isolated from the process liquid.

Indicator flags are rotated by the float magnet assembly as it moves up and down in the chamber providing highly visible indication of where the level is inside of the vessel.



Tubular

Reflection

Transparent

Multi-Port

JERGUSON
A PRODUCT OF CLARK-RELIANCE

NIHON KLINGAGE CO., LTD.

PENBERTHY

LEVEL RADAR TRANSMITTER

Is used for custody transfer and inventory control applications with NMI- and PTB-approvals and meets the requirements according to OIML R85 and API 3.1B. NMR81 is particularly suited for free space applications up to 70m.



Endress+Hauser **E+H** YOKOGAWA **Y**

PRESSURE GAUGE

Our Pressure Gauge with various products such as :

- General Industrial Pressure Gauge (Type A, B, D)
- Stainless steel Pressure Gauge (GV)
- Glycerine Bath Pressure Gauge (GV)
- Small Pressure Gauge (GV, GK, GA)
- High Pressure Gauge (Type A, B, D)
- Diaphragm Seal Pressure Gauge (SC, SD)
- Digital Pressure Gauge (GC31, 61, 66, 67)



NAGANO KEIKI

WIKAI

RESISTANCE TEMPERATURE DETECTION

Resistance Temperature Detection is an intelligent HART signal converter, with a combined average temperature sensor and water bottom interface probe.



Endress+Hauser  YOKOGAWA 

ROTAMETER

A rotameter is used to measure the rate of liquid or gas flowing through a system of pipes at any given time. They provide a constant flow rate measurement and can also offer optional switching capabilities to control the flow in a system or process.



 TECFLUID

 KOBOLD

YOKOGAWA 



PRESSURE TANK

PRESSURE TANK

AIR RECEIVER TANK

Design Standard : ASME

Standard Working Pressure : 10 Kg / cm²

Test Pressure : 15 Kg / cm²

Volume : 500 lt – 5.000 lt

Material : SS 400, JIS G3101

Finishing : Sand Blasting

Coating : Epoxy Primer Paint and Finished.

Accessories : Manhole, Support, Inlet, Outlet, Lifting Lug, Pressure Gauge, Pressure Switch, Safety Valve.



DIESEL MONTHLY TANK

Design Standard : ASME

Standard Working Pressure : 1 (Bar)

Test Pressure : 1.5 (Bar)

Volume : 6000 lt – 12000 lt

Material : SS 400, JIS G3101

Finishing : Sand Blasting

Coating : Epoxy Primer Paint and Finished.

Accessories : Manhole, Support, Inlet, Outlet, Lifting Lug, Air Vent, Drain Sight Glass.



PRESSURE TANK

Design Standard : ASME

Standard Working Pressure : 10 (Bar)

Test Pressure : 15 (Bar)

Volume : 500 lt – 5.000 lt

Material : SS 400, JIS G3101

Finishing : Sand Blasting

Coating : Epoxy Primer Paint and Finished

Accessories : Manhole, Support, Inlet, Outlet, Lifting Lug, Pressure Gauge, Pressure Switch, Safety Valve, Temperature Control, Steam Trap, DII.

HOT STORAGE TANK



MEMBRANE TANK

Expansion vessels with diaphragm membrane and inner lining, from 8 to 430 liters, usable for hot potable water systems and/or autoclave systems with connection to the electric pump.



PENTAIR
WELLMATE

VAREM

WATER PRESSURE TANK

Design Standard : ASME

Standard Working Pressure : 10 Kg / cm²

Test Pressure : 15 Kg / cm²

Volume : 500 lt – 5.000 lt


Material : SS 400, JIS G3101

Finishing : Sand Blasting

Coating : Epoxy Primer Paint and Finished.

Accessories : Manhole, Support, Inlet, Outlet, Lifting Lug, Pressure Gauge, Pressure Switch, Safety Valve.



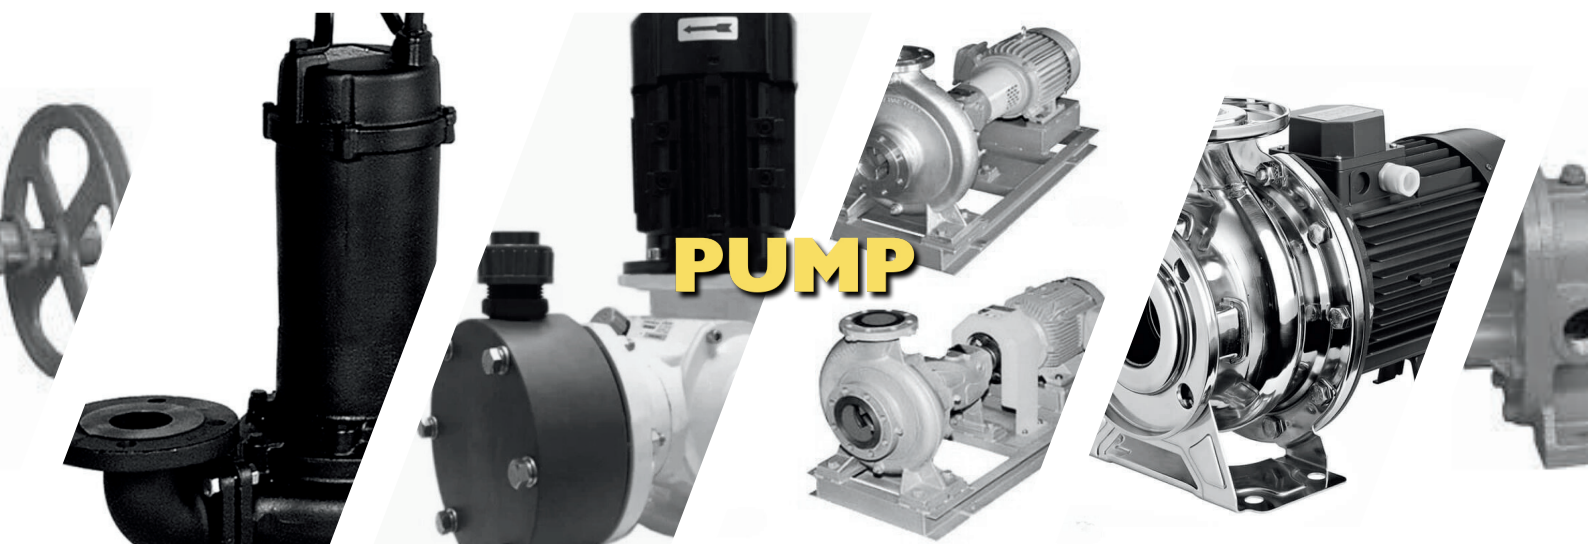

PUMP



CENTRIFUGAL PUMP

APPLICATIONS

- General water supply, irrigation and drainage
- Pumping of sea water, brine, alkali and condensate
- Circulating hot and cold water supply
- Sprinkling & fire fighting system
- Swimming Pool

DESIGN

- End suction volute pumps with vertical centerline discharge
- Back Pull Out (BPO) design allows the removal all rotating elements without disturbing the casing, piping or motor

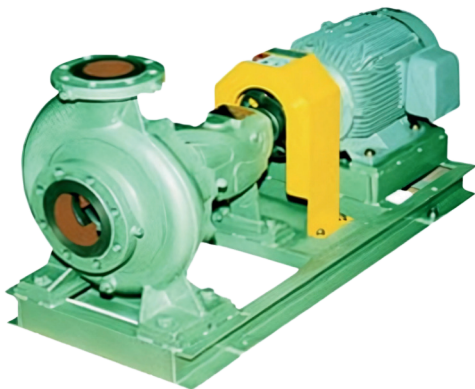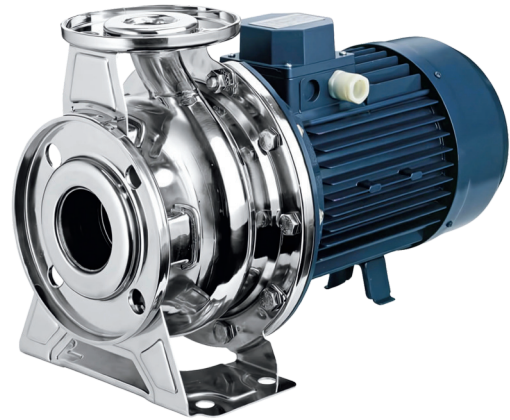

CHEMICAL DOSING PUMP

The G series metering pump, also known as the MACROY pump, is now NSF/ANSI 61 and 372 certified for municipal compliance and safety assurance. Capable of handling pressures up to 175 psi (12 bar) and flow rates up to 310 gph (1181 l/h) it is an ideal pump for water treatment applications.

Combining heavy-duty industrial drive technology with state-of-the-art design and manufacturing processes, this mechanically-actuated diaphragm pump eliminates flow restrictions, reduces the possibility of hydraulic oil contamination of process liquid, and ensures smooth output.



PUMP

GEAR PUMP

These pumps can be used for a variety of industrial and agricultural jobs including pumping :

- A-crude
- B-crude
- oil
- urine fluids and
- fertilizer
- water drainage
- laver collection
- moving boiling oil
- millet jelly
- coaltar
- etc.



 KOSHIN

SUBMERSIBLE PUMP

Submersible Motor Pump


- Dry hole and wet hole installation
- Watertight cable entry system ensures safe operation without water leakage into the terminal casing
- Terminal board provides easy cable connection
- High efficiency, compact design motor with thermal detector for each phase winding
- Self-cooling system with cooling jacket ensures safe operation of the motor in air
- Floating type leak detector warns of mechanical seal failure
- Bullet type, two-way mechanical seal in tandem arrangement provides easy maintenance and high reliability
- High efficiency, closed mixed flow impeller accepts large solids
- Replaceable liner ring provides efficient sealing



 TORISHIMA

 EBARA

WASTE WATER TREATMENT EQUIPMENT

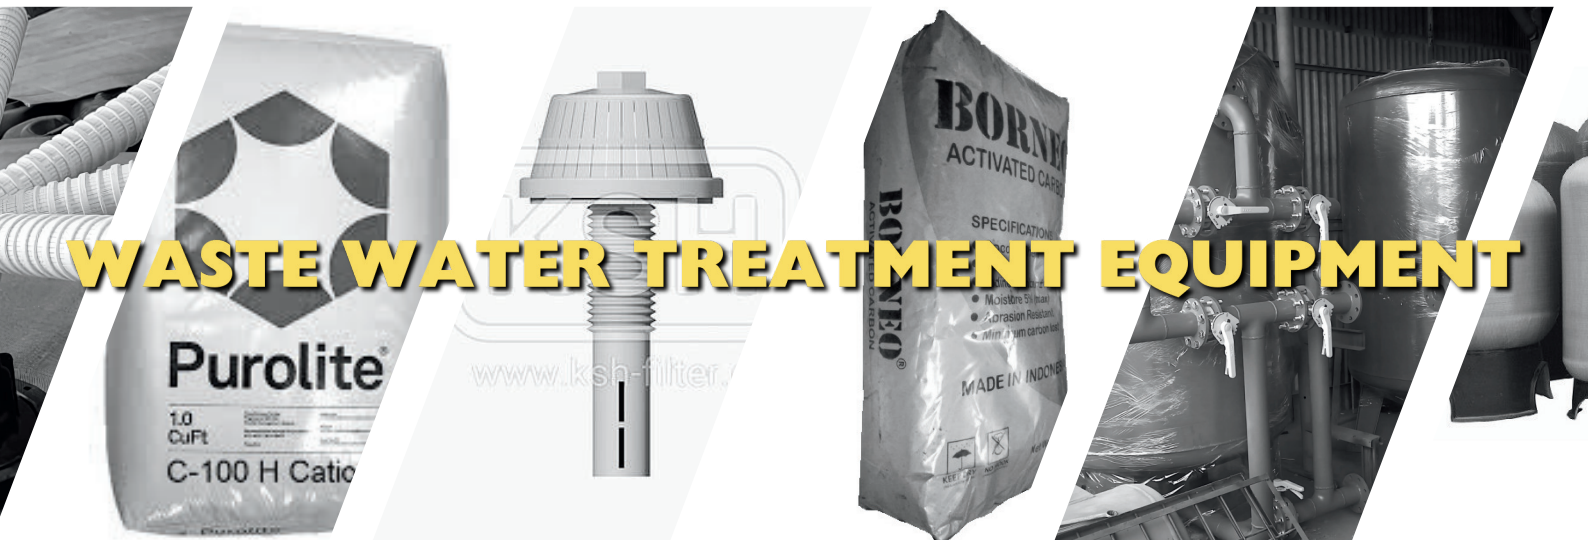

WASTE WATER TREATMENT EQUIPMENT

Activated Carbon is a porous material that removes organic compounds from liquids and gases by a process known as "adsorption." In adsorption, organic molecules contained in a liquid or gas are attracted and bound to the surface of the pores of the activated carbon as the liquid or gas is passed through.

The structure of activated carbon is composed of graphitic plates. These plates are connected by carbon-carbon bonds, which create a porous structure and give an extensive internal surface area, which is where adsorption occurs. Adsorption is one type of Van der Waal's force, which works on the molecular level to attract molecules to each other. With activated carbon, the surface of the carbon is attracted to the compound being adsorbed.

Intermolecular attractions in the smallest pore of the carbon particle result in adsorption forces that cause precipitation of adsorbates from solutions, and condensation of adsorbate gases.

Adsorbates actually undergo a type of phase change because they are so much lower in energy once they are adsorbed.

Spent activated carbon doesn't swell like an ion exchange resin or sponge upon use. All of the work takes place inside the pores - deep inside the granules - where the water molecule at the surface is displaced by an adsorbate molecule.

ACTIVATED CARBON



ANION EXCHANGE RESIN

Our Anion Exchange Resin is a strongly basic, gelular anion exchange resin with beads of uniform size (monodisperse) based on a styrene-divinylbenzene copolymer. The monodisperse beads are chemically and osmotically highly stable. The optimized kinetics lead to an increased operating capacity compared to ion exchange resins with heterodisperse bead size distribution.



CATION EXCHANGE RESIN

Our Cation Resin is a strongly acidic, gel-type cation exchange resin in the Na-form with beads of uniform size (monodisperse) based on a styrene-divinylbenzene copolymer.

Due to a special manufacturing process this resin type is extremely resistant to chemical, osmotic and mechanical stress. That leads to very low leachables even under critical conditions like higher temperatures, presence of oxidants (O₂, Fe-oxides) and external regeneration processes. Even at very short cycle times (one cycle = service + regeneration) the special ion exchange resin matrix leads to long life cycles in demineralization processes. The high total capacity results in high operating capacities with a very low ionic leakage and a very high regenerant utilization.

The extremely high monodispersity and very low fines result in particularly low pressure losses paired with an efficient and cost optimized operation of demineralization plants.



WASTE WATER TREATMENT EQUIPMENT

MANGANESE GREEN SAND

GreensandPlus™ is a black filter media used for removing soluble iron, manganese, hydrogen sulfide, arsenic and radium from groundwater supplies.

The manganese dioxide coated surface of GreensandPlus acts as a catalyst in the oxidation reduction reaction of iron and manganese.



CARBON & SAND FILTER TANK

We offer reinforced fiberglass construction & carbon steel for outstanding performance and durability.


Available in capacities up to 6,000 Liters, composite vessels are available with a variety of different ports and base options.



WASTE WATER TREATMENT EQUIPMENT

FILTER NOZZLE STRAINER

The hub SK6 filter system for six Type A filter arms which are mounted at a 20° degree angle. Allowing the system to adapt to the bottom of the tank and optimizing the utilization of the filter medium, resulting in the desired total diameter of the system.

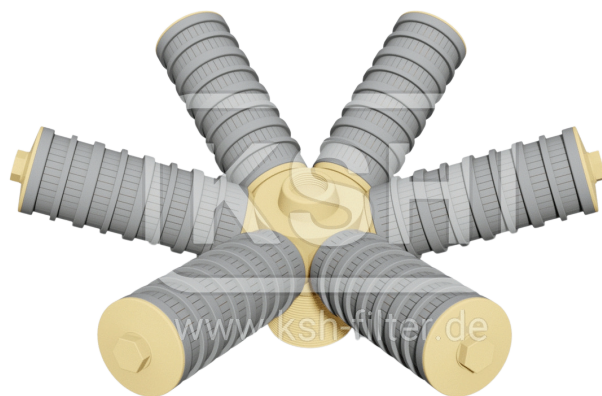

KSH

MUSHROOM STRAINER

Due to its conical design, the filter nozzle type K1 are particularly resistant to pressure. The nozzle is equipped with a bottom disc for complete emptying up to the level of the nozzle floor.

Alternatively, the type KR1 has a closed bottom disc which prevents the loss of filter media on small contact surfaces (dia. <65mm).

Should you require any further information or technical advice, please feel free to contact us.



KSH

1. FABRIKASI FOAM BLADDER TANK

- Multi Fabrindo Cilegon, Jawa Barat (Vol = 2000Ltr)
- PT. Pertamina (Vol = 500Ltr)

2. RUBBER BLADDER TANK

- PT. Cikarang Listrindo Tbk, Cikarang Jawa Barat (Vol = 1000Ltr)
- PT. Agung, Semarang Jawa Tengah (Vol 200 Ltrs)
- Akademi Teknik Adyaksa, Surakarta Jawa tengah (vol = 100Ltr)
- Mason Pine Hotel, Priangan Bandung, Jawa Barat (vol = 80Ltr)
- Tirta Usaha Mandiri, Jakarta Barat (500 Ltr)

3. FABRIKASI MEMBRANE TANK

- PT. Sanbe Bandung - Jawa Barat (Vol = 1000Ltr)
- Anggar Pesawat Nurtanio Bandung Jawa Barat (Vol = 1000Ltr)
- PT. Toyota Astra Showroom -Bekasi - Jawa Barat (Vol = 500Lf & 300 Ltr)
- PT. Palmas Cikarang, Jawa Barat (Vol = 500Ltr)
- PT. Cikarang listrindo, Cikarang Jawa Barat (Vol = 1000Ltr)
- PT. Manunggal Energi Nusantara, MM 2000 Cikarang - Jawa Barat (Vol = 300Ltr) .
- PT. Wijaya Karya - Jakarta (Vol 500 Ltr).
- PT. Mer Engineering, Bekasi- Jawa Barat (Vol = 300Ltr)
- PT. Indo Milk, Cirasas -Bogor - Jawa Barat (Vol = 500Ltr)
- PT. Puri Nusa Eka Persada., B7ndung- Jawa Barat (Vol = 500Ltr) .
- PT. Parimar Jatim Perkasa, Surabaya, Jawa Timur (Vol = 1Ltr) .
- PT.Neastle Indonesia Cikarang Jawa Barat (Vol = 500Ltr)
- PT. Excel Mandiri, Malang- Jawa Timur (Vol = 100Ltr)
- PT. Kaldu sari Nabati Indonesia, Bandung - Jawa barat (vol 200 Ltr) .
- PT. Indo Food Sukses Makmur, Surabaya - Jawa Timur (Vol = 60Ltr .
- PT. Taiyo Sinar Raya Tehnik, Bekasi- Jawa Barat (V = 1000Ltr)
- PT. Multi Sindo, Cempaka Putih Jakarta Pusat (Vol = 20 Ltr & 300 Ltr).
- PT. Presisi Teknik Utama, Bali (Vol = 500Ltr)
- PT. Cikarang Listrindo, Cikarang- Jawa Barat (Vol = 1000Ltr)
- PT. Sinar Asih Indonesia, Bekasi - Jawa Barat (Vol = 500Ltr)
- PT. Taiyo Raya Sinar Tehnik, Bekasi-Jakarta Timur (Vol = 1000LTR)
- PT. RSUD Sardjito Yogyakarta- Jateng (Vol = 1000Ltr)
- PT. Toyota Astra Motor, Bekasi - Jabar r(Vol = 500Ltr) .
- PT. Waruna Nusa Sentana, Medan (Vol = 20Ltr)
- PT. Manunggal Energi Nusantara, Ejip Cikarang, Jawa Barat (Vol = Tank 200 Ltr)
- CV. Mitra Daya Utama, Cikarang - Bekasi - Jawa Barat (Vol = 60 Ltr).
- CV. Duta Sejahtera, Purwokerto - Jateng (Vol = 500Ltr)
- PT. Rekeyasa Industri, Jakarta Selatan (Vol = 500Ltr)
- PT. Mutiara Inti Karya, Cirasas -Jakarta Timur (Vol = 200Ltr)
- PT. Harifa Bangun Mandiri, Jakarta Barat (Vol = 1.000 Ltr) .
- PT. Mer Engineering, Bekasi - Jawa Barat (Vol = 80Ltr)
- PT. Excel Mandiri, Malang Jawa Timur (Vol = 500Ltr)
- PT. Indo Food Sukses Makmur, Surabaya- Jawa Timur (Vol = 200Ltr)
- PT. Multi Sindomulya, Jakarta Pusat (Vol = 20 Ltr, 300 Ltr)
- PT. Teksindo Delta Jaya, Jakarta Barat (Vol = 1000, 500Ltr)
- PT. Waruna Nusa Sentana, Belawan- Medan (Vol = 19Ltr)
- PT. Crown Beverage Indonesia, Surya Cipta- Krawang Jawa Barat (Vol = 1.000 Ltr) .
- PT. Teksindo Delta Jaya, Cicalengka Tangerang (Vol = 1000 dan 500 Ltr) .

4. GENERAL TRADING

- PT. Yasulor Indonesia, Jababeka Cikarang- Jawa Barat (Flame Aresster dia 2").
- PT. Api Mitra Graha SCBD Sudrman - Jakarta Selatan (Boost Fan Transformer)

- PT. Multifabrindo, Cilegon Jawa Barat (Foam chamber dia 2")
- PT. Tali Jagat Sejati, Cirebon - Jawa Tengah (Level Control shand And Jurges)
- PT. Sinar Suria Mitra Graha, Jakarta Utara (Jar test).
- TBBM, Balongan - Jawa Tengah (Breather Valve " Shand And Jurs")
- PT. Sinar Suria Mitra Graha, Jakarta Utara (Breather Valve " Precon ")
- PT. Warko, Cipondoh- Jakarta Selatan (Breather Valve " KSPC" dia 2")
- PT. Sinar Suria Mitra Graha, Jakarta Utara (Slot Dipping" Precont").
- PT. Sinar Suria Mitra Graha, Jakarta Utara (Closed Circuit Sampler Aljac).
- PT. KTC Coal Mining & Energi Samarinda (Seal Manhole Cipacon).
- PT. Bajamukti Tirtaperkasa, Jakarta (Link Belt Bearing, Ex. USA).
- PT. Karya Abadi, Solo (Link belt Bearing, Ex. USA).
- CV. Anugerah Agung, Kediri - Jawa Timur (Flowmeter Tecfluid PT11, Ex. Spain)
- PT. Mitra Utama, Jakarta (Automatic Multiport Valve, Softener Tank) Ex. USA.
- PT. Kota Jati Furindo, Jepara Jawa Tengah. (Belimo SMU 230)
- PT. Surya Darma, Aceh - Sumatera Barat(Safety Valve Hisec Ex. Taiwan)
- PT. Zi-Techasia, Jakarta (Pressure Reducing Valve), Ex. Italy.
- PT.Globalindo Engineering, Banten - Cilegon (Safety Valve Samyang Ex. Korea)
- PT.Globalindo Engineering, Banten Cilegon (PRV Ex. Itap).
- PT.ZI- Tetza, Rasuna Said- Jakarta selatan (PRV Ex. Itap).
- PT.ABB Indonesia, Tangerang - Jawa Barat (Groundfos Pump).
- Unitech Indonesia, Glodok - Jakarta Barat (Returline Filter Ex. India).
- Cv. Multi Prima Tehnik, Manggar Balikpapan (Api Bottom Loading Adaptor) 25. PT. Cahaya Aryatama, Balikpapan Kalimantan Timur (Breather Valve Shand and jurge).
- PT. Ardian Ari, Medan (Breather Valve dia4" Precon
- PT. Ramaindo Eka Putra, Surabaya (Slot Dipping ^ "Precon).
- PT. Karya Disa Utama Pare pare, Sulawesi selatan (Slot Dipping 6"" Precon).
- PT. Karya Disa Utama Pare pare, Sulawesi selatan (Breather Valve 6"" Precon).
- Cipati Yudhapersada, Balikpapan, Kaltim (Grafit Coupler)
- Global Borneo Transport- Banjarmasin (Cipacon 0
- Media Testerindo, Ciracas - Jakarta timur (Breather Valve 4").
- Nuansa Cahaya Baru, Seinggan Balikpapan (Grafit coupler)
- PT. Torindo Utama Sakti, Mampang- Jakarta selatan (Breather Valve)
- CV. Sriwijaya Tehnik, samarinda (Grafit coupler 4x 3)
- PT. Torindo Utama Sakti, Mampang- Jakarta selatan (Level Indicator
- CV. Sriwijaya Tehnik, samarinda (Camplock 3" Type D)
- PT. Gunung Umsini Manokwari- Papua Barat (Breather valve 4")
- PT. Citra Inti Maju, Balikpapan (Manhole Cover 16")
- PT. Catang Tomang Indah, Kemayoram - Jakarta Pusat (Breather ValVae Precon 6").
- PT. Victoria Prima, Kemayoran- Jakarta Pusat (strainer Bintang)
- PT. Fajar Saudara Kusuma, Pontianak (Ummbrrella nozzel P 914)
- PT. Autore Pearl Culture, Lombok. (Housing Filter Amatek, Ex. USA)
- PT. Tata Tirta Wahana, Bogor (KSH Strainer Ex. Germany)
- PT. Surya Alam Tunggal, Sidoarjo, Jatim (KSH Strainer Ex. Germany).
- PT. Mitra Exellent, Balikpapan (Bottom Strainer KSH SK8 16 Ruas)
- PT. Bridgestone Indonesia, Pondok Ungu Bekasi - Jawa Barat (Resin)
- PT. Mercatura Indonesia, Kalibata Jakarta Timur (Pentair 440).

OUR CUSTOMER

- PT. Lautan Luas, Tbk, Semarang (Water Meter ½"), Onda, Ex. China).
- PT. Hotel Grand Hayatt, Yogyakarta (resin Lewatit, Ex. Germany)

5. FABRIKASI HOT WATER STORAGE TANK

- Hotel JW Mariot Batam (Vol = 1.5Ltr)
- Hotel JW Mariot Batam (Vol = 2.5Ltr)
- Hotel JW Mariot Batam (Vol = 3.5Ltr)
- Hotel Novotel Batam (Vol = 6Ltr)

6. FABRIKASI SAND FILTER TANK

- PT. Pakoakuina, Sunter - Jakarta Utara (Vol = 500 Ltr).
- Kawasan Industri Krawang Prima, Krawang Barat - Jawa Barat (Vol = 1.5Ltr) .
- PT. Daihatsu Motor Plant Casting, KIIC Krawang- Jawa Barat (Vol = 500Ltr)
- PT. Panasonic Indonesia, Cileungsi - Jawa Barat (Vol = 2Ltr)
- Hotel JW Mariot, Batam (Flow Rates = 15 M3 dan 20 M3)
- PT. Pacific Oil And Gas (Perlak) Ltd, Thamri - Jakarta Selatan (Vol = 1Ltr)
- PT. Gunze Indonesia, Ejib Cikarang Selatan - Bekasi - Jawa Barat (Vol = 3Ltr) .
- PT. Fummakila, Surya Cipta - Krawang - Jawa Barat (Vol = 2Ltr)
- PT. Fress On Time Sea Food, Narogong- Bekasi (Vol = 1Ltr)
- CV.Mitra Daya Utama, Cikarang - Bekasi (Vol = 300Ltr .
- PT.Hino Motor Manufacturing Indonesia, Cikampek - Jawa Barat (Vol = 1Ltr) .
- PT. Navigat Energy, Sudirman -Jakarta Selatan (Vol = 1Ltr)
- Pabrik Rokok Grendel, Malang - Jawa Timur (Vol = 1000Ltr)
- PT. Sinar Meadow, Pulogadung- Jakarta Timur (Sand Filter 500 Ltr) .
- Lotte Indonesia, Krawang - Jawa Barat (Vol = 500Ltr)
- PT. Kalimantan Sawit Kusuma, Kalimantan (63 M3/hr).
- PT. Gunze Cikarang - Jawa Barat (Vol = 3000Ltr) .

7. FABRIKASI ACTIVATED CARBON FILTER TANK

- PT. Pakoakuina, Sunter - Jakarta Utara (Vol = 500Ltr)
- Kawasan Krawang Prima, Krawang Barat (Vol = 1Ltr)
- PT. Star Solution, Cikampek - Jawa Barat (Vol = 1Ltr)
- Hotel JW Mariot - Batam (Vol = 15 M3 dan 20 M3)
- PT.Fresh On Time Sea Food, Narogong- Bekasi (300 Ltr).
- Pabrik Sawit Pondok Ungu, Bekasi - Jawa Barat (Vol = 2Ltr)
- Batam Mall, Batam (Vol = 2Ltr)

8. FABRIKASI WATER SOFTENER TANK

- PT. Kalimantan Sawit Kusuma, Pontianak (Flow Rates 63 M3/hr)
- PT. Pakoakuina, Sunter - Jakarta Utara (Vol = 500Ltr)
- PT. Daihatsu Plant Casting, KIIC Krawang- Jawa Barat (Vol = 500Ltr)
- PT. Fresh On Time Sea Food, Narogong- Bekasi - Jawa Barat (500 Ltr).
- PT. Multi Mekanika Serasi, Cikarang- Bekasi - Jawa Barat (Vol = 300 Ltr).
- PT. Lotte Engineering & Construction, Cikampek- Jawa Barat (Vol = 500Ltr)

9. FABRIKASI DEMINELIZER TANK

- PT. Pakoakuina, Sunter - Jakarta Utara (Vol = 750 Ltr) .
- PT. Hino Motor Manufacturing Indonesia, Cikampek - Jawa barat (Vol = 1Ltr) .

10. FABRIKASI CLARIFIER TANK

- Kawasan Karawang Prima, Krawang Barat- Jawa Barat (Flow Rates 5 Lt / det).

11. FABRIKASI DEGASIFIER TANK

- Water Tech Technology, Jakarta Timur (Vol = 1500 Ltr).

12. FABRIKASI COUGULANT TANK

- Kawasan Krawang Prima, Krawang Barat- Jawa Barat (Flow Rates 5 Lt / det).

13. FABRIKASI CHEMICAL TANK

- Kawasan Krawang Prima, Krawang Barat- Jawa Barat (Vol = 500Ltr)
- PT. Doulton Multifortuna, Balaraja, Banten (Vol = 500Ltr)

14. FABRIKASI MIXER TANK

- Kawasan Krawang Prima, Krawang Barat- Jawa Barat (Vol = 500Ltr)
- Mursid - Bogor (Vol = 500Ltr)
- PT. Doulton Multifortuna, Balaraja, Banten (Vol = 500Ltr)

15. FABRIKASI WATER PRESSURE TANK

- Pdam Purwantoro, Wonogiri-Jateng (Vol = 3Ltr)
- Pdam Wuryantoro, Wonogiri-Jateng (Vol = 3l) .
- Pdam Gubuk, Purwodadi- Jateng. (Vol = 1Ltr)
- RS Jantung M Kamil, Padang - Sumatera Barat (Vol = 2Ltr)
- PT. Wira Bangun Persada, Rawamangun - Jakarta Timur (Vol = 500Ltr)
- CV. Ina Bangun Mandiri, Padang - Sumatera Barat (Vol = 500Ltr)
- CV. Nagari Padang - Sumatera Barat (Vol = 500Ltr)
- PT. Berkat Air Hidup, Jakarta Selatan (Vol = 250Ltr) .
- PT. Sinar Bangun Gemilang, Ciomas- Bogor - Jawa Barat (Vol = 500Ltr)
- Proyek Persemaian Playen Gunung Kidul - Jateng (Vol = 3Lt)
- PT. Cahaya Beringin, Makasar - Sulawesi (Vol. 2. 000 Ltr).
- PT. Tri Agung Sinergi, Cileungsi - Jawa Barat (Vol = 500) .
- PT. Cometco Kreasi Prima, Jakarta Utara (Vol = 500 Ltr).
- PT. Sumber Makmur, Jakarta Barat (Vol = 2Ltr)
- PT. ABB Tangerang - Jakarta Barat (1.000 Ltr)
- PT. Puramas Mahardika, Semarang-Jateng (Vol = 4Ltr)
- CV. Wira Bangun Persada, Rawamangun-Jakarta - Timur (Vol = 500Ltr)
- PT.Zidarur, Surabaya Jawa Timur (Vol = 2Ltr ,
- PT. Lestari Jaya, NTT (Vol = 3Ltr)
- PT. Jakarta International Expo, Kemayoran- Jakarta Pusat (Vol = 17m ^ 3)
- PT. Buana Global Mandiri, Kebun Jeruk Jakarta Barat (Vol = 300Ltr)
- PT. Commetco Kreasi Prima, sunter Jajarta Utara (Vol = 500 Ltr).
- Sumber Makmur, Latumenten- Jakarta Barat (Vol = 2Ltr)
- PT. Bagas Associates, Cinere, Jaksel (Vol = 200Ltr)
- AL FALLAH Cianjur, Jawa Barat (Vol = 2Ltr)

16. FABRIKASI RECOVERY HOT WATER TANK

- Batam Mall (Vol = 1500Ltr)

17. FABRIKASI VACUUM TANK

- RSUD Sumedang, Jawa Barat (Vol = 500Ltr)
- PT.Medical Permana Cipta (Vol = 500Ltr)

18. FABRIKASI AIR BUFER TANK

- PT. Enerba Technology, BSD- Jakarta Selatan (Vol = 2Ltr)
- PT. BEM. Jakarta Timur (Vol = 300Ltr)
- PT. Realtec Engineering Indonesia, Gresik - Jawa Timur (Vol = 100Ltr)
- Pt. Venturindo Engineering. Krawang - Jawa Barat (Vol = 500Ltr)



FOAM BLADDER TANK SPECIALIST

CV. TIO TECHNOLOGY

HEAD OFFICE

**Jl. Ring Road Bubulak A-4 Bubulak, Bogor Barat, Kota Bogor 16115,
Jawa Barat, Indonesia**

Telp: +62 (21) 3972 0077

Fax: +62 (21) 3972 0077

E-mail: adm.tiotech@gmail.com

CENTRAL JAVA OFFICE

**Jl. Adi Sumarmo Km. 6.5, Gedongan, Colomadu, Karanganyar 57173,
Jawa Tengah, Indonesia**

Telp: +62 (271) 7464 538

Fax: +62 (271) 7464 538

E-mail: tiotech.solo@yahoo.com

